



3p. Cat I-II

Serie 150.75


HP 30/75 - KW 22/55



10/32 cm. - 4/13 inc.



1808


Mod.	cm.	inc.	HP min./max.	KW min./max.	N. 	kg.	Lbs.
L 904	90	35	30/75	22/55	4	430	948
L 1004	100	39	30/75	22/55	4	440	970
L 1104	110	43	30/75	22/55	4	450	992
L 1306	130	51	35/75	26/55	6	540	1191
L 1456	145	57	35/75	26/55	6	550	1213
L 1606	160	63	38/75	27/55	6	570	1257
L 1808	180	71	40/75	29/55	8	670	1477
L 2008	200	79	40/75	29/55	8	690	1521

Optional

PdF. 540= I 145

II 167 III 206 RpM


+60 kg. 132 Lbs



150 mm.
6 inc.



1,5 / 2,5 Km/h
0,9 / 1,6 miles/h

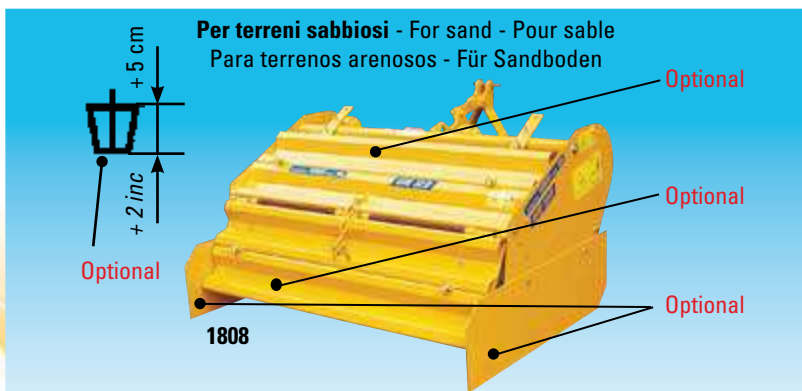

Optional

Optional

Optional

Optional

1808