


# Serie 150.95

HP 35/95 - KW 26/70

10/35 cm. - 4/14 inc.

3p. Cat I-II

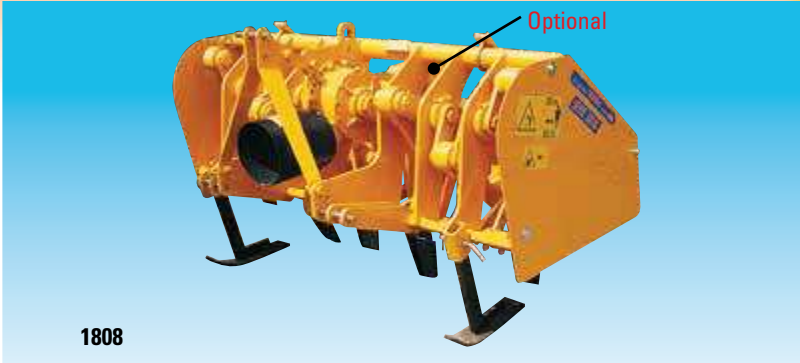

1808

Mod.	cm.	inc.	HP min./max.	KW min./max.	N. $\frac{1}{2}$	kg.	Lbs.
N 1004	100	39	35/95	26/70	4	500	1102
N 1154	115	45	35/95	26/70	4	510	1125
N 1356	135	53	40/95	29/70	6	630	1389
N 1506	150	59	40/95	29/70	6	650	1433
N 1656	165	65	40/95	29/70	6	670	1477
N 1808	180	71	48/95	35/70	8	800	1764
N 2008	200	79	50/95	36/70	8	820	1808
N 2210	220	87	58/95	42/70	10	970	2138
N 2510	245	96	60/95	44/70	10	990	2183

## STANDARD

PdF. 540 = 167 RpM

PdF. 750 = 232 RpM

Optional

PdF. 540 =

I 145

II 167

III 206 RpM



1656


20 cm 8 inc

Optional

0

20 cm 8 inc

+100 Kg. 220 Lbs

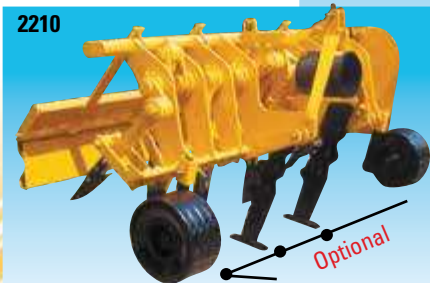

2210

Optional