




3p. Cat II



Serie 220.250
 HP 70/250 - KW 58/181
 15/50 cm. - 6/20 inc.



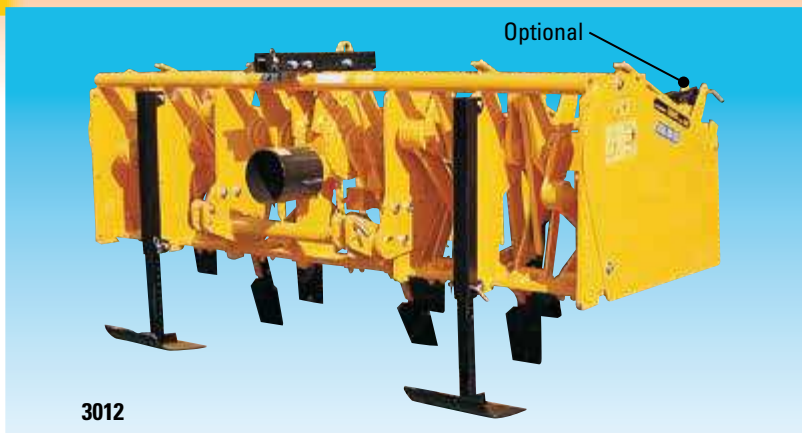


3012

Mod.	cm. \leftrightarrow inc.	HP KW min./max.	N. \updownarrow	kg.	Lbs.
E 2008	200 79	80/250 58/181	8	2300	5060
E 2508	245 96	90/250 66/181	8	2460	5412
E 2510	245 96	90/250 66/181	10	2630	5786
E 3010	300 118	100/250 73/181	10	2800	6160
E 3012	300 118	120/250 88/181	12	2950	6490
E 3512	350 138	130/250 95/181	12	3300	7260
E 3514	350 138	130/250 95/181	14	3440	7568
E 4016	400 157	140/250 102/181	16	3820	8404

STANDARD x .250/.350/B150/B160

Optional x 150

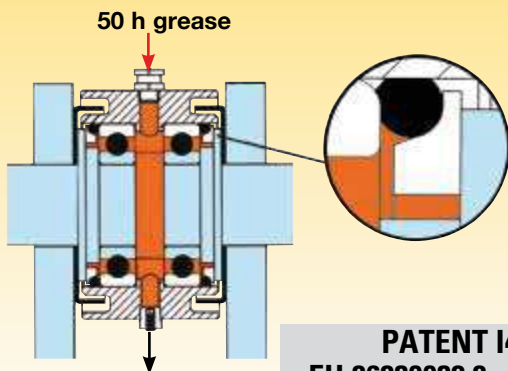

PATENT I4780B/85
EU 86830032.8 - USA 4.645.216