




2006






ECO-NURSE Versione base per attacco a tre punti

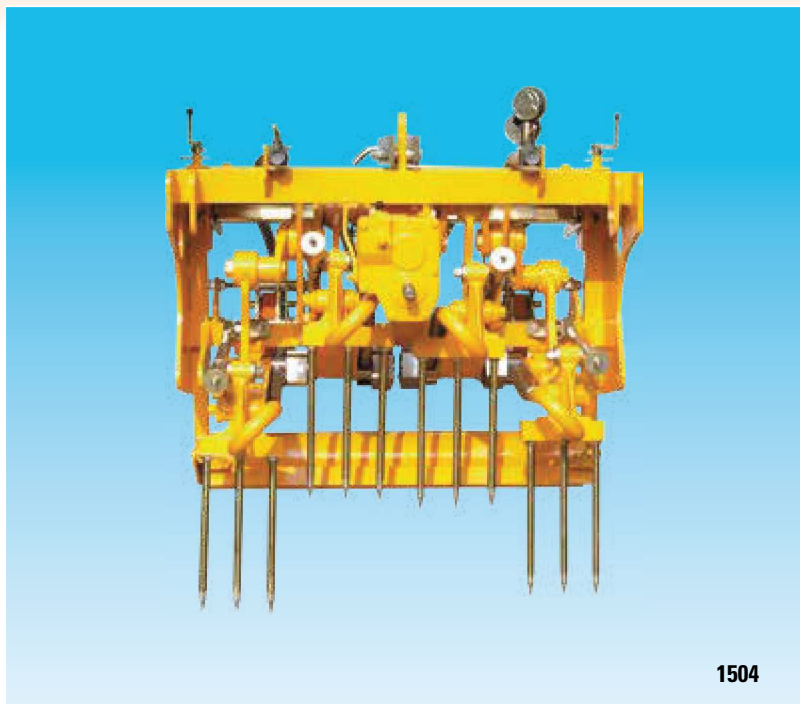3p. Cat I-II
Regolabile 0/20 o 0/30 o 0/40



1504

Mod.	1504	2106	2708	3310
 cm	155	215	275	335
N. 	4	6	8	10
N. 	14	20	26	32
N. getti	28	40	52	64

ECO-NURSE Versioni trainata su rullo e trainata completa di Caldaie


2006



VERSIONE TRAINATA
SU RULLO



2106 T

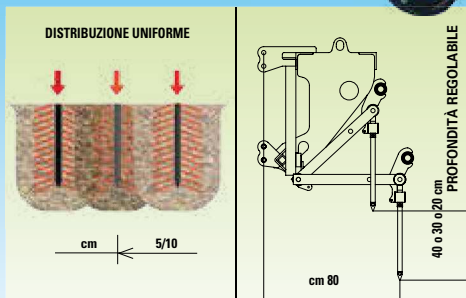

Mod.	1504 T	2106 T	2708 T	3310 T
Largh. tot cm	170	230	290	350
Largh. rullo cm	145	205	265	325
Capacità rullo Ø 55 cm lt.	290	425	560	695



2106 C

A RICHIESTA
PER UNA MIGLIORE
DISTRIBUZIONE
DEL CARICO
LA CISTERNA
PUÒ ESSERE MESSA
DAVANTI

per Mod.	1504 C	2106 C	2708 C	3310 C
N. caldaie	3	4	5	6
Consumo gasolio lt/h	30	40	50	60
Portata acqua lt/h	2700	3600	4500	5400
K calorie erogate	375.000	500.000	625.000	750.000