



# 1 SNODO - 1 joint - 1 articulation - 1 articulación - 1 Gelenke

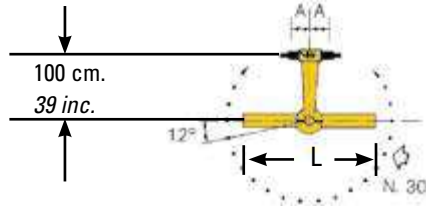

Serie 45-1 HP 15/80 - Kw 11/58 45 cm - 18 inc.								
Mod.	A cm.	↔ inc.	L cm.	↔ inc.	HP min. /	KW max.	Kg.	Lbs.
M 100	15/15	6/6	100	39	15/80	11/58	135	298
M 125	15/15	6/6	125	49	15/80	11/58	140	309
M 150	15/15	6/6	150	59	20/80	14/58	145	320
M 175	15/15	6/6	175	69	25/80	18/58	150	331
M 200	15/15	6/6	200	79	30/80	22/58	160	353
M 225	15/15	6/6	225	89	35/80	26/58	175	386
M 250	15/15	6/6	250	98	40/80	29/58	190	419

**M 200**  
3p. Cat I-II

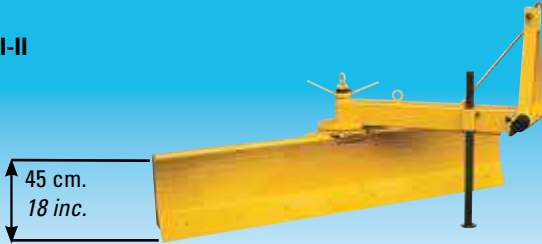

Serie 55-1 HP 40/150 Kw 29/110 55 cm. - 22 inc.								
Mod.	A cm.	↔ inc.	L cm.	↔ inc.	HP min. /	KW max.	Kg.	Lbs.
LP 150	25/25	10/10	150	59	40/150	29/110	200	441
LP 175	25/25	10/10	175	69	40/150	29/110	210	463
LP 200	25/25	10/10	200	79	50/150	36/110	230	507
LP 225	25/25	10/10	225	89	60/150	44/110	260	573
LP 250	25/25	10/10	250	98	70/150	51/110	290	639
LP 275	25/25	10/10	275	108	80/150	58/110	310	683
LP 300	25/25	10/10	300	118	90/150	66/110	330	728
LP 350	25/25	10/10	350	138	90/150	66/110	380	838
LP 400	25/25	10/10	400	157	90/150	66/110	420	926

**LP 200**  
3p. Cat II

