





2 SNODI - 2 joints - 2 articulations - 2 articulaciones - 2 Gelenke

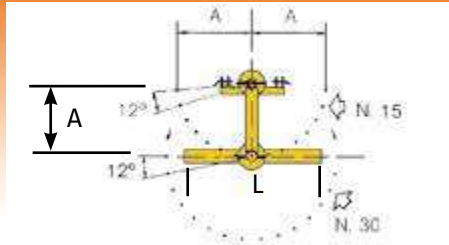

Serie 45-2 HP 15/80 - Kw 11/58 45 cm. - 18 inc.								
Mod.	A cm.	↔ inc.	L cm.	↔ inc.	HP min. /	KW max.	Kg.	Lbs.
MS 100	100/100	39/39	100	39	15/80	11/58	160	353
MS 125	100/100	39/39	125	49	15/80	11/58	165	364
MS 150	100/100	39/39	150	59	20/80	14/58	170	375
MS 175	100/100	39/39	175	69	25/80	18/58	185	386
MS 200	100/100	39/39	200	79	30/80	22/58	195	408
MS 225	100/100	39/39	225	89	35/80	26/58	210	441
MS 250	100/100	39/39	250	98	40/80	29/58	225	474

MS 175
3p. Cat I-II

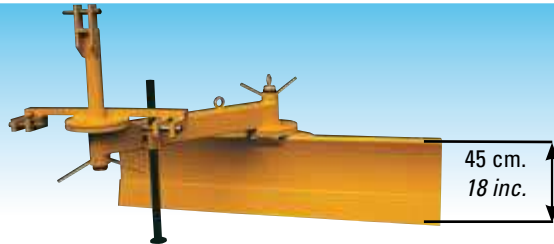

Serie 55.2 HP 40/150 - Kw 29/110 55 cm. - 22 inc.								
Mod.	A cm.	↔ inc.	L cm.	↔ inc.	HP min. /	KW max.	Kg.	Lbs.
LPS 150	100/100	39/39	150	59	40/150	29/110	235	518
LPS 175	100/100	39/39	175	69	40/150	29/110	245	540
LPS 200	100/100	39/39	200	79	50/150	36/110	265	584
LPS 225	100/100	39/39	225	89	60/150	44/110	295	650
LPS 250	120/120	47/47	250	98	70/150	51/110	335	739
LPS 275	120/120	47/47	275	108	80/150	58/110	355	783
LPS 300	140/140	55/55	300	118	90/150	66/110	385	849
LPS 350	140/140	55/55	350	138	90/150	66/110	435	959
LPS 400	140/140	55/55	400	157	90/150	66/110	475	1047

LPS 250
3p. Cat I-II

