




1 SNODO CON ROTAZIONE ANCHE IDRAULICA

1 joint with hydraulic rotation

1 articulation avec rotation même hydraulique


1 articulación con rotación hidráulica

1 Gelenke mit Rotation, auch Hydraulisch

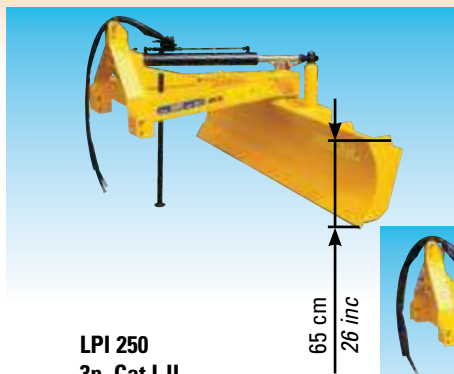

LPI 250
3p. Cat I-II

65 cm
26 inc



LPI 300 3p. Cat I-II

65 cm
26 inc

Serie 65.1/l HP 40/150 - Kw 29/110 \updownarrow 65 cm. - 26 inc.

Mod.	L cm.	\longleftrightarrow inc.	HP min. /	KW max.	Kg.	Lbs.
LPI 150	150	59	40/150	29/110	450	990
LPI 175	175	69	40/150	29/110	460	1012
LPI 200	200	79	50/150	36/110	490	1078
LPI 225	225	89	60/150	44/110	520	1144
LPI 250	250	98	70/150	51/110	550	1210
LPI 275	275	108	80/150	58/110	610	1124
LPI 300	300	118	90/150	66/110	650	1169
LPI 350	350	138	90/150	66/110	730	1279
LPM	idem senza pistone con movimento manuale without piston with manual movement				-30	-66



LPI 250